

LAVABICCHIERI • GLASSWASHERS • LAVE-VERRES • GLÄSERSPÜLMASCHINEN


mod. P40

| cod. OWB2MF00TV401005

DOTAZIONI • EQUIPMENT • ÉQUIPEMENT • AUSRÜSTUNG

Scheda elettronica

Electronic board
Carte électronique
Elektronikplatine



Dosatore peristaltico detergente e brillantante

Peristaltic detergent and rinse aid dispenser
Doseur péristaltique de produit de lavage et de rinçage
Peristaltischer Dosierer für Spülmittel und Klarspüler



Due cesti stoviglie

Two crockery baskets
Deux paniers à vaisselle
Zwei Geschirrkörbe
Dos cestas de vajilla



400 x 400 mm

Pompa di scarico

Drain pump
Pompe de vidange
Ablaufpumpe



Filtri di superficie in acciaio inox

Stainless steel surface filters
Filtres de surface en acier inox
Schmutzfilter aus Edelstahl



Giranti in acciaio inox

Stainless steel arms
Bras en acier inox
Laufräder aus Edelstahl



Temperatura e pressione di risciacquo garantiti

Guaranteed rinse temperature and pressure
Température et pression de rinçage garanties
Garantierte Spültemperatur und Spüldruck



CARATTERISTICHE TECNICHE • TECHNICAL FEATURES • CARACTÉRISTIQUES TECHNIQUES • TECHNISCHE DATEN

Alimentazione elettrica

Electric supply
Alimentation électrique
Stromversorgung

3x230/400 V + N
(50 Hz)

Capacità boiler

Boiler capacity
Capacité surchauffeur
Kesselkapazität

7 L

Pressione alimentazione

Required water pressure
Pression alimentation
Wasserzulaufdruck

2 ÷ 4 bar

Potenza pompa lavaggio

Wash pump power
Puissance pompe de lavage
Pumpenleistung

0,45 kW

Capacità vasca

Wash tank capacity
Capacité cuve
Wanneninhalt

14 L

Tubo di carico/scarico Ø

Water supply hose/drain hose
Tuyau d'entrée/de vidange
Einfüllschlauch/Ablaufschlauch

3/4" gas/22 mm

Resistenza boiler

Boiler element
Puissance résistance surchauffeur
Heizleistung Boiler

6 kW

Temperatura risciacquo

Rinse temperature
Température rinçage
Spültemperatur

82 °C
65 °C

Temperatura acqua alimentazione

Supply water temperature
Température de l'eau d'alimentation
Speisewassertemp

MAX 50 °C

Resistenza vasca

Tank element
Puissance résistance cuve
Heizleistung Wanne

1,8 kW

Temperatura lavaggio

Wash temperature
Température lavage
Waschtemperatur

62 °C

Livello di rumorosità

Noise emission
Émission sonore
Arbeitsplatzbezogener emissionswert

<75 dBA

Potenza massima assorbita

Total power rating
Puissance maximale
Maximale aufgenommene Leistung

6,45 kW

Numero cicli

Number of cycles
Nombre du cycles
Anzahl der Zyklen

8

Peso netto

Net weight
Poids net
Nettogewicht

38 kg

OPTIONAL • OPTIONAL • OPTIONNEL • OPTIONAL



Cesto rotondo Ø41 cm
Round basket Ø41 cm
Panier rond Ø41 cm
Rundkorb Ø41 cm



Break tank

ACCESSORI • ACCESSORIES • ACCESSOIRES • ZUBEHÖR



Addolcitore automatico
Automatic water softener
Adoucisseur automatique
Automatischer Wasserenthärter



Sistemi di osmosi inversa
Reverse osmosis systems
Systèmes d'osmose inverse
Umkehrosmoseanlagen




Addolcitore manuale
Manual water softener
Adoucisseurs manuels
Manuelle Wasserenthärter



Supporto lavastoviglie
Dishwasher support
Support lave-vaisselle
Geschirrspüler-Support

DISEGNO TECNICO • TECHNICAL DRAWING • DESSIN TECHNIQUE • TECHNISCHE ZEICHNUNG

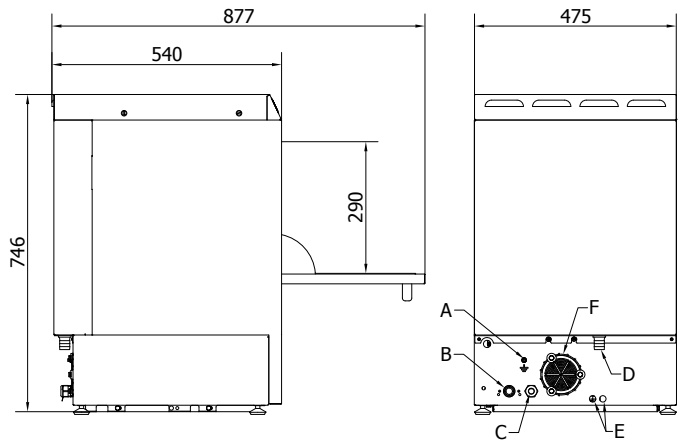

A

Morsetto equipotenziale
Clamp equipotential
Serrer équipotentiel
Klemme Äquipotential

D

Scarico acqua
Drain water
Drain d'eau
Wasserabfluss

B

Ingresso acqua
Water inlet
Arrivée d'eau
Wassereinlass

E

Tubi detergenti
Detergent pipes
Tubes de détergent
Waschmittelröhrchen

C

Alimentazione elettrica
Power supply
Alimentation électrique
Elektrische Energie

F

Griglia di ventilazione
Ventilation grid
Grille de ventilation
Gitter von Belüftung