

LAVASTOVIGLIE A CAPOTE


HOOD-TYPE DISHWASHER • LAVE-VAISSELLE À CAPOT • HAUBENSPÜLMASCHINEN

mod. P60

cod. OWB6MF00TV401005

DOTAZIONI • EQUIPMENT • ÉQUIPEMENT • AUSRÜSTUNG

Scheda elettronica

Electronic board
Carte électronique
Elektronikplatine

Dosatore peristaltico detergente e brillantante

Peristaltic detergent and rinse aid dispenser
Doseur péristaltique de produit de lavage et de rinçage
Peristaltischer Dosierer für Spülmittel und Klarspüler

Due cesti stoviglie in acciaio inox

Two stainless steel crockery baskets
Deux paniers à vaisselle en acier inox
Zwei Geschirrkörbe aus Edelstahl

500 x 630 mm

Pompa di scarico

Drain pump
Pompe de vidange
Ablaufpumpe

Filtri di superficie in acciaio inox

Stainless steel surface filters
Filtres de surface en acier inox
Schmutzfilter aus Edelstahl

Giranti in acciaio inox

Stainless steel arms
Bras en acier inox
Laufräder aus Edelstahl

Temperatura e pressione di risciacquo garantiti

Guaranteed rinse temperature and pressure
Température et pression de rinçage garanties
Garantierte Spültemperatur und Spüldruck

CARATTERISTICHE TECNICHE • TECHNICAL FEATURES • CARACTÉRISTIQUES TECHNIQUES • TECHNISCHE DATEN

Alimentazione elettrica

Electric supply
Alimentation électrique
Stromversorgung3x230/400 V + N
(50 Hz)

Capacità boiler

Boiler capacity
Capacité surchauffeur
Kesselkapazität

8 L

Pressione alimentazione

Required water pressure
Pression alimentation
Wasserzulaufdruck

2 ÷ 4 bar

Potenza pompa lavaggio

Wash pump power
Puissance pompe de lavage
Pumpenleistung0,75 +
0,75 kW

Capacità vasca

Wash tank capacity
Capacité cuve
Wanneninhalt

25 L

Tubo di carico/scarico Ø

Water supply hose/drain hose
Tuyau d'entrée/de vidange
Einfüllschlauch/Ablaufschlauch

3/4" gas/25 mm

Resistenza boiler

Boiler element
Puissance résistance surchauffeur
Heizleistung Boiler

6 kW

Temperatura risciacquo

Rinse temperature
Température rinçage
Spültemperatur

82 °C

Temperatura acqua alimentazione

Supply water temperature
Température de l'eau d'alimentation
Speisewassertemp

MAX 50 °C

Resistenza vasca

Tank element
Puissance résistance cuve
Heizleistung Wanne

4,5 kW

Temperatura lavaggio

Wash temperature
Température lavage
Waschtemperatur

62 °C

Livello di rumorosità

Noise emission
Émission sonore
Arbeitsplatzbezogener emissionswert

<75 dBA

Potenza massima assorbita

Total power rating
Puissance maximale
Maximale aufgenommene Leistung

7,5 kW

Numero cicli

Number of cycles
Nombre du cycles
Anzahl der Zyklen

8

Peso netto

Net weight
Poids net
Nettogewicht

170 kg

OPTIONAL • OPTIONAL • OPTIONNEL • OPTIONAL



Break tank

ACCESSORI • ACCESSORIES • ACCESSOIRES • ZUBEHÖR



Addolcitore automatico
Automatic water softener
Adoucisseur automatique
Automatischer Wasserenthärter



Addolcitore manuale
Manual water softener
Adoucisseurs manuels
Manuelle Wasserenthärter



Sistemi di osmosi inversa
Reverse osmosis systems
Systèmes d'osmose inverse
Umkehrosmoseanlagen



Tavolo entrata dx con lavello e foro di sbarazzo
Right pre-wash table with sink and waste hole
Table avec evier et trou entrée droite
Rechter Einlaufisch mit Spülbecken und Abfallöffnung



Tavolo entrata sx con lavello e foro di sbarazzo
Left pre-wash table with sink and waste hole
Table avec evier et trou entrée gauche
Linker Einlaufisch mit Spülbecken und Abfallöffnung




Tavolo sx/dx/frontale
Left/right/front access
Table entrée gauche/droite/avant
Tisch links/rechts/frontal



Doccia con braccio flessibile
Shower with flexible arm
Douchette flexible
Schlauchpendelbrause

DISEGNO TECNICO • TECHNICAL DRAWING • DESSIN TECHNIQUE • TECHNISCHE ZEICHNUNG

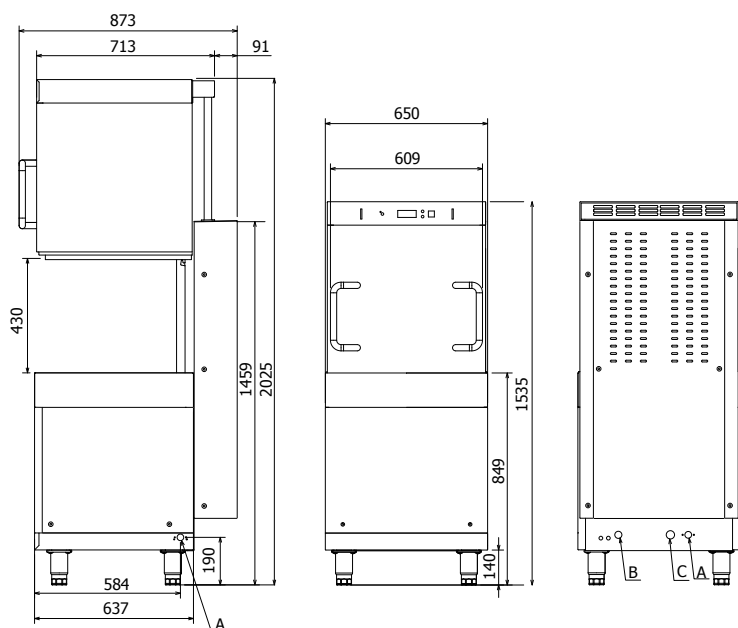

- A** Ingresso acqua
Water inlet
Arrivée d'eau
Wassereinlass
- B** Alimentazione elettrica
Power supply
Alimentation électrique
Elektrische Energie
- C** Scarico acqua
Drain water
Drain d'eau
Wasserabfluss