

## LAVAGGETTI • POT WASHER • LAVE-OBJETS • GERÄTESPÜLMASCHINEN


mod. P80

| cod. OWB4SCF0TV401005

### DOTAZIONI • EQUIPMENT • ÉQUIPEMENT • AUSRÜSTUNG

#### Scheda elettronica

Electronic board  
Carte électronique  
Elektronikplatine




#### Dosatore peristaltico detergente e brillantante

Peristaltic detergent and rinse aid dispenser  
Doseur péristaltique de produit de lavage et de rinçage  
Peristaltischer Dosierer für Spülmittel und Klarspüler



#### Due cesti stoviglie in acciaio inox

Two stainless steel crockery baskets  
Deux paniers à vaisselle en acier inox  
Zwei Geschirrkörbe aus Edelstahl



500 x 630 mm

#### Pompa di scarico

Drain pump  
Pompe de vidange  
Ablaufpumpe



#### Filtri di superficie in acciaio inox

Stainless steel surface filters  
Filtres de surface en acier inox  
Schmutzfilter aus Edelstahl



#### Giranti in acciaio inox

Stainless steel arms  
Bras en acier inox  
Laufräder aus Edelstahl



#### Temperatura e pressione di risciacquo garantiti

Guaranteed rinse temperature and pressure  
Température et pression de rinçage garanties  
Garantierte Spültemperatur und Spüldruck



### CARATTERISTICHE TECNICHE • TECHNICAL FEATURES • CARACTÉRISTIQUES TECHNIQUES • TECHNISCHE DATEN

#### Alimentazione elettrica

Electric supply  
Alimentation électrique  
Stromversorgung

3x230/400 V + N  
(50 Hz)

#### Capacità boiler

Boiler capacity  
Capacité surchauffeur  
Kesselkapazität

19 L

#### Pressione alimentazione

Required water pressure  
Pression alimentation  
Wasserzulaufdruck

2 ÷ 4 bar

#### Potenza pompa lavaggio

Wash pump power  
Puissance pompe de lavage  
Pumpenleistung



0,75 +  
0,75 kW

#### Capacità vasca

Wash tank capacity  
Capacité cuve  
Wanneninhalt

60 L

#### Tubo di carico/scarico Ø

Water supply hose/drain hose  
Tuyau d'entrée/de vidange  
Einfuhrschlauch/Ablaufschlauch

3/4" gas/25 mm

#### Resistenza boiler

Boiler element  
Puissance résistance surchauffeur  
Heizleistung Boiler

9 kW

#### Temperatura risciacquo

Rinse temperature  
Température rinçage  
Spültemperatur

82 °C

#### Temperatura acqua alimentazione

Supply water temperature  
Température de l'eau d'alimentation  
Speisewassertemp

MAX 50 °C

#### Resistenza vasca

Tank element  
Puissance résistance cuve  
Heizleistung Wanne

4,5 kW

#### Temperatura lavaggio

Wash temperature  
Température lavage  
Waschtemperatur

62 °C

#### Livello di rumorosità

Noise emission  
Émission sonore  
Arbeitsplatzbezogener emissionswert

<75 dBA

#### Potenza massima assorbita

Total power rating  
Puissance maximale  
Maximale aufgenommene Leistung

10,5 kW

#### Numero cicli

Number of cycles  
Nombre du cycles  
Anzahl der Zyklen

8

#### Peso netto

Net weight  
Poids net  
Nettogewicht

120 kg

OPTIONAL • OPTIONAL • OPTIONNEL • OPTIONAL



**Break tank**

ACCESSORI • ACCESSORIES • ACCESSOIRES • ZUBEHÖR



**Addolcitore automatico**  
Automatic water softener  
Adoucisseur automatique  
Automatischer Wasserenthärter



**Sistemi di osmosi inversa**  
Reverse osmosis systems  
Systèmes d'osmose inverse  
Umkehrosmoseanlagen




**Addolcitore manuale**  
Manual water softener  
Adoucisseurs manuels  
Manuelle Wasserenthärter



**Supporto lavastoviglie**  
Dishwasher support  
Support lave-vaisselle  
Geschirrspüler-Support

DISEGNO TECNICO • TECHNICAL DRAWING • DESSIN TECHNIQUE • TECHNISCHE ZEICHNUNG

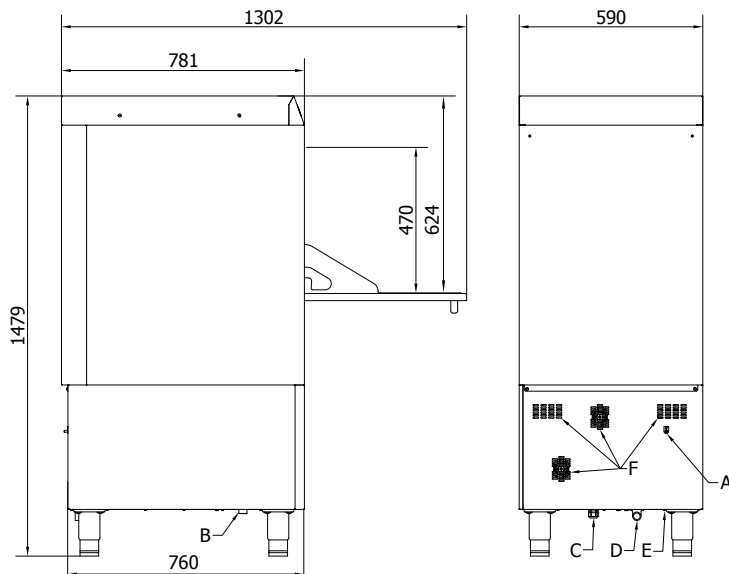

- A** Ingresso acqua  
Water inlet  
Arrivée d'eau  
Wassereinlass
- B** Alimentazione elettrica  
Power supply  
Alimentation électrique  
Elektrische Energie
- C** Scarico acqua  
Drain water  
Drain d'eau  
Wasserabfluss