


LAVASTOVIGLIE · DISHWASHERS · LAVE-VAISSELLE · GESCHIRRRSPÜLMASCHINEN
mod. S50T

| cod. OWB4MVT0T0001005

DOTAZIONI · EQUIPMENT · ÉQUIPEMENT · AUSRÜSTUNG
Scheda elettronica

 Electronic board
 Carte électronique
 Elektronikplatine

Dosatore meccanico del brillantante

 Mechanical rinse aid dispenser
 Doseur mécanique de produit de rinçage
 Mechanischer Klarspülerspender

Due cesti stoviglie

 Two crockery baskets
 Deux paniers à vaisselle
 Zwei Geschirrkörbe


500 x 500 mm

Risciacquo a freddo attivabile tramite pulsante dedicato

 Cold rinse activated by a dedicated button
 Rinçage à froid activable au moyen d'un bouton dédié
 Kaltspülung über spezielle Taste aktivierbar

Possibilità di selezionare tre diversi cicli di lavaggio

 Three different washing cycles available
 Possibilité de sélectionner trois cycles de lavage différents
 Möglichkeit zur Auswahl von drei verschiedenen Reinigungszyklen

Temperatura di risciacquo garantita

 Guaranteed rinse temperature
 Température de rinçage garanties
 Garantierte Spültemperatur


CARATTERISTICHE TECNICHE · TECHNICAL FEATURES · CARACTÉRISTIQUES TECHNIQUES · TECHNISCHE DATEN

Alimentazione elettrica Electric supply Alimentation électrique Stromversorgung	3x230/400 V + N (50 Hz)	Capacità boiler Boiler capacity Capacité surchauffeur Kesselkapazität	8 L	Pressione alimentazione Required water pressure Pression alimentation Wasserzulaufdruck	2 ÷ 4 bar
Potenza pompa lavaggio Wash pump power Puissance pompe de lavage Pumpenleistung	0,75 kW	Capacità vasca Wash tank capacity Capacité cuve Wanneninhalt	29 L	Tubo di carico/scarico Ø Water supply hose/drain hose Tuyau d'entrée/de vidange Einfüllschlauch/Ablaufschlauch	3/4" gas/31 mm
Resistenza boiler Boiler element Puissance résistance surchauffeur Heizleistung Boiler	6 kW	Temperatura risciacquo Rinse temperature Température rinçage Spültemperatur	82 °C	Temperatura acqua alimentazione Supply water temperature Température de l'eau d'alimentation Speisewassertemp	MAX 50 °C
Resistenza vasca Tank element Puissance résistance cuve Heizleistung Wanne	2,2 kW	Temperatura lavaggio Wash temperature Température lavage Waschtemperatur	55 °C	Livello di rumorosità Noise emission Émission sonore Arbeitsplatzbezogener emissionswert	<75 dBA
Potenza massima assorbita Total power rating Puissance maximale Maximale aufgenommene Leistung	6,75 kW	Durata ciclo Cycle time Durée du cycle Zykluslänge	120/180/240"	Peso netto Net weight Poids net Nettogewicht	52 kg

OPTIONAL • OPTIONAL • OPTIONNEL • OPTIONAL



Dosatore peristaltico detergente e brillantante
Peristaltic detergent and rinse aid dispenser
Doseur péristaltique de produit de lavage et de rinçage
Peristaltischer Dosierer für Spülmittel und Klarspüler



Filtro di superficie in polipropilene
Surface filter in polypropylene
Filtre de surface en polypropylène
Oberflächenfilter aus Polypropylen



Pompa di scarico
Drain pump
Pompe de vidange
Ablaufpumpe



Filtri di superficie in acciaio inox
Stainless steel surface filters
Filtres de surface en acier inox
Schmutzfilter aus Edelstahl



Addolcitore incorporato
Built-in water softener
Adoucisseur intégré
Integrierter Wasserenthärter

ACCESSORI • ACCESSORIES • ACCESSOIRES • ZUBEHÖR



Addolcitore automatico
Automatic water softener
Adoucisseur automatique
Automatischer Wasserenthärter




Supporto lavastoviglie
Dishwasher support
Support lave-vaisselle
Geschirrspüler-Support



Addolcitore manuale
Manual water softener
Adoucisseurs manuels
Manuelle Wasserenthärter

DISEGNO TECNICO • TECHNICAL DRAWING • DESSIN TECHNIQUE • TECHNISCHE ZEICHNUNG

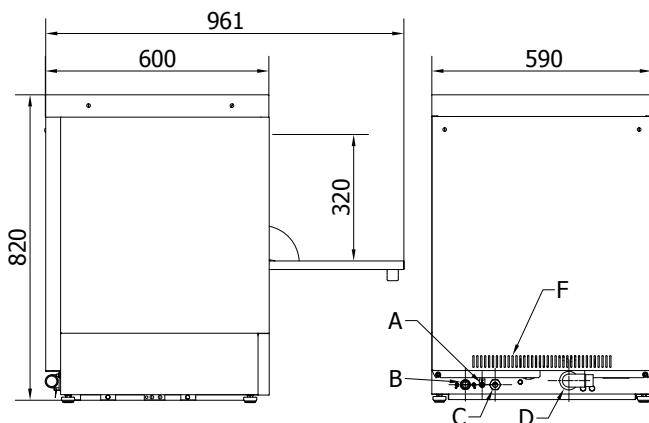

A

Morsetto equipotenziale
Clamp equipotential
Serrer équipotentiel
Klemme Äquipotential

D

Scarico acqua
Drain water
Drain d'eau
Wasserabfluss

B

Ingresso acqua
Water inlet
Arrivée d'eau
Wassereinlass

E

Tubi detergenti
Detergent pipes
Tubes de détergent
Waschmittelröhrchen

C

Alimentazione elettrica
Power supply
Alimentation électrique
Elektrische Energie

F

Griglia di ventilazione
Ventilation grid
Grille de ventilation
Gitter von Belüftung